



MVX 500 4T - SAE 15W-50

YACCOSYNTH synthetic technology engine oil for 4-stroke motorbike engines

USES

MVX 500 4T 15W50 is a synthetic technology engine oil for 4-stroke motorcycles. Suitable for all types of motorbikes (roadsters, custom, GT and sports bikes). Provides increased protection of the clutch/gear unit (JASO MA2). Improves the reliability of high-revving engines. Provides perfect engine lubrication, even under severe service conditions, all year round.

Specifications:

API SN
JASO T903:2006 MA2 oil code M033YCO387


MAIN PHYSICAL DATA

		Methods	Units	15W-50
Density at	20°C	ASTM D4052	kg/m ³	874
Kinematic viscosity at	40°C	ASTM D445	mm ² /s	132
Kinematic viscosity at	100°C	ASTM D445	mm ² /s	18
Viscosity index		ASTM D2270		152
Pour point		ASTM D97	°C	-33
Cleveland Open Cup Flash Point		ASTM D92	°C	226
Dynamic viscosity at	-20°C	ASTM D5293	mPa·s	6000
HTHS Viscosity at	150 °C	CEC L-036-90	mPa·s	4.8
Sulphated ash		ASTM D874	% mass	1.1
Total Base Number (TBN)		ASTM D2896	mgKOH/g	10

The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ SAE 15W50 grade provides increased engine protection at high temperatures and reliability under heavy loads.
- ▶ Good detergent-dispersant properties for a cleaner engine
- ▶ Specific additives prevent clutch slip.
- ▶ Very good protection of the engine and gearbox against wear.
- ▶ Low volatility means reduced oil consumption.

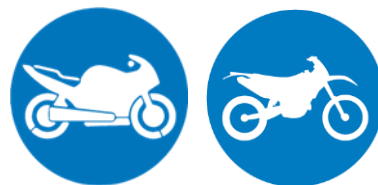

M033YCO387

MA2

JASO T903:2016

PERFORMANCE IS
GUARANTEED by
YACCO S.A.S.



facebook.com/yaccosas

twitter.com/yaccosas

youtube.com

