



MVX 100 2T

High-quality mineral oil for 2-stroke engines

USES

Lubricant suitable for small displacement 2-stroke engines, such as mopeds.

Made using carefully selected premium mineral base oils.

Suitable for oil injector systems and premix.

Premix ratio: 2% to 4%, depending on the manufacturer's requirements.

Specifications:

API TC

JASO FB

MVX 100 2T exceeds the performance levels required by API and JASO specifications.


MAIN PHYSICAL DATA

		Methods	Units	Values
Density at	20°C	ASTM D4052	kg/m ³	880
Kinematic viscosity at	40°C	ASTM D445	mm ² /s	77
Kinematic viscosity at	100°C	ASTM D445	mm ² /s	9.5
Viscosity index		ASTM D2270		100
Pour point		ASTM D97	°C	-21
Cleveland Open Cup Flash Point		ASTM D92	°C	109
Colour				Blue

The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ Ensures good piston-ring sealing.
- ▶ Protects the engine against corrosion, even when not used for long periods of time.
- ▶ Excellent protection against wear.
- ▶ Dyed blue for easy detection in gasoline/oil mixtures.
- ▶ Pre-diluted for easier mixing with gasoline.

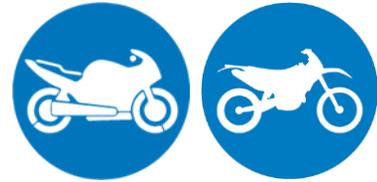

facebook.com/yaccosas

twitter.com/yaccosas

youtube.com

