



# MVX Scoot 4 - SAE 10W-40

YACCOSYNTH synthetic technology engine oil  
for 4-stroke scooter engines

## USES

MVX Scoot 4 10W40 is a synthetic technology oil for 4-stroke scooter engines. Ideal for frequent stop-and-go urban traffic conditions. Also suitable for integrated gearboxes, ensuring increased protection of the clutch/gear unit (JASO T903:2016 MA specification).

Provides excellent engine protection under all service conditions, all year round.

## Specifications:

API SN  
JASO MA


## MAIN PHYSICAL DATA

	Methods	Units	10W-40
Density at 20°C	ASTM D4052	kg/m <sup>3</sup>	857
Kinematic viscosity at 40°C	ASTM D445	mm <sup>2</sup> /s	95
Kinematic viscosity at 100°C	ASTM D445	mm <sup>2</sup> /s	14.5
Viscosity index	ASTM D2270		158
Pour point	ASTM D97	°C	-42
Cleveland Open Cup Flash Point	ASTM D92	°C	226
Dynamic viscosity at -25°C	ASTM D5293	mPa·s	5800
HTHS Viscosity at 150°C	CEC L-036-90	mPa·s	3.8
Sulphated ash	ASTM D874	% mass	1.1
Total Base Number (TBN)	ASTM D2896	mgKOH/g	10

*The data given in this table represents typical production values and should not be taken as specifications.*

## PROPERTIES & ADVANTAGES

- ▶ Outstanding stability of oil viscosity at high temperatures.
- ▶ SAE 10W40 grade provides quick oil flow upon start-up.
- ▶ Good detergent-dispersant properties prevent the formation of deposits.
- ▶ Excellent engine and gearbox protection against wear.
- ▶ Compatible with 4-stroke engine catalyst converters.
- ▶ Specific additives prevent clutch slip (JASO MA specification).

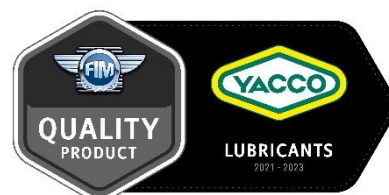

[facebook.com/yaccosas](https://facebook.com/yaccosas)

[twitter.com/yaccosas](https://twitter.com/yaccosas)

[youtube.com](https://youtube.com)

