




# FORK FLUID 2.5W

FORK FLUID

## USES

Synthetic hydraulic fluid for upside down or cartridge forks. Tested under race conditions. Provides optimal and smooth operation of suspension. Particularly recommended for KAYABA cartridge-type forks. This is the most fluid fork oil of our YACCO FORK FLUID product range. For firmer damping, use FORK FLUID 5W, 7.5W, 10W, 15W or 20W.

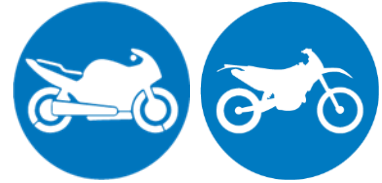

## MAIN PHYSICAL DATA

		Methods	Units	2.5W
Density at	20°C	ASTM D4052	kg/m <sup>3</sup>	877
Kinematic viscosity at	40°C	ASTM D445	mm <sup>2</sup> /s	15
Kinematic viscosity at	100°C	ASTM D445	mm <sup>2</sup> /s	3.65
Viscosity index		ASTM D2270		131
Pour point		ASTM D97	°C	-54
Cleveland Open Cup Flash Point		ASTM D92	°C	150

*The data given in this table represents typical production values and should not be taken as specifications.*

## PROPERTIES & ADVANTAGES

- ▶ High-shear performance provides smooth and progressive compression/extension of the fork.
- ▶ Very low pour point maintains good performance at very low temperatures.
- ▶ Excellent damping under all service conditions.
- ▶ Enhanced anti-friction properties.
- ▶ Protects O-rings.
- ▶ Compatible with fork oil seals.



[facebook.com/yaccosas](https://facebook.com/yaccosas)

[twitter.com/yaccosas](https://twitter.com/yaccosas)

[youtube.com](https://youtube.com)

