



GRAISSE FOOD EP 2

Food-grade extreme-pressure grease,
based on anhydrous calcium soap

USES

Recommended for ball and roller bearings, plain bearings, joints, seals, multi-purpose greasing applications.

Particularly recommended for heavy loads and in the presence of humidity.

Food-grade grease using a white, pharmaceutical-grade base oil.

Wide range of applications: agriculture, forestry, food industry, etc.

Effective between -20°C and $+120^{\circ}\text{C}$

Specifications:

NLGI grade 2

ISO 6743-9 : ISO-L-XBEHB 2

DIN 51502 : DIN KP2M-20

Compatible with both kosher and halal requirements.

Meets NSF H1 food-grade specifications


MAIN PHYSICAL DATA

	NLGI 2 grade
Colour	amber
Drop point	$>140^{\circ}\text{C}$
Thickener	anhydrous calcium
Weld load	4800 N
Consistency	265 - 295

The data given in this table represents typical production values and should not be taken as specifications.

PROPERTIES & ADVANTAGES

- ▶ May be used in applications where incidental food contact may potentially occur.
- ▶ Excellent extreme-pressure and anti-wear properties.
- ▶ Safe lubrication and long equipment life
- ▶ High lubrication capacity thanks to a high drop point thickener.
- ▶ Good water resistance.
- ▶ Enhanced protection against oxidation.

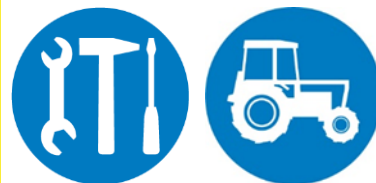

 facebook.com/yaccosas

 twitter.com/yaccosas

 youtube.com

